




ANSEC

In Ceiling Speaker SPK2

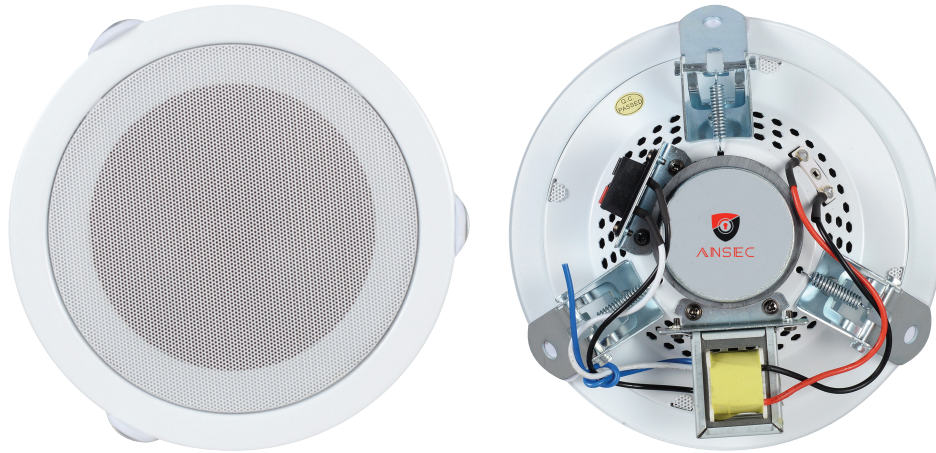

Specification / Model	SPK2
Speaker caliber	5.5inch x1
Rated power at 100V	3-6W
Max power	6W
Input (KΩ)	70V /100V
Frequency Response (Hz)	110-16Khz
Sensitivity (1w/1m)	91±2dB
Material	Iron baffle+Iron net
Weight	0.75 kg
Panel size	Ø198x51 mm
Carton dimensions (20PCS /20PCS/10PCS)	425x345x425 mm

High-quality in-ceiling loudspeakers, delivering exceptional sound quality and value for a wide variation of applications, ranging from paging and announcements to background music systems in a wide range of business applications, including hotels, restaurants and pubs, corporate offices, retail stores. Line transformer allows fast and smooth connections to 100 Volt public address or low impedance systems. The mounting of the loudspeaker into the ceiling is achieved with a quick-fix mechanism, offering great installers convenience and lifetime stability. The construction of the speakers' housing is made out of iron while the front is covered by a steel grill.

